

## UNIFLOOD MINI

WEATHER PROOF FLOOD LIGHT LUMINAIRE



### Mechanical Data

Material	: Poly Carbonate
Weight	: 4.0 Kg (Approx)
IP Protection	: IP 65 as per IS 13947 / 1993 / IEC 60529 / 1989
Colour	: Black
Cable Entry	: 1 x 1/2" ET
Glass	: 4 mm thick tempered glass
Gasket	: Silicon rubber sealing gasket


### Electrical Data

Voltage	V	: 230 V AC , 50 Hz
Lamp Wattage	W	: 26 W - 150 W
Suitable Lamps		
HPSV		50 W & 70 W
HPMV		80 W & 125 W
Metal Halide		70 W & 150 W
CFL		26 W, 32 W & 42 W

### Description

Weatherproof flood light luminaire which is made up of Poly Carbonate material. Inside the housing there is a reflector to brighten the luminous output. Gaskets are provided for weatherproof protection. Lamp is placed inside the fitting and duly wired up to terminal strips. Cable entry is provided for wiring and looping.

GA Drawing

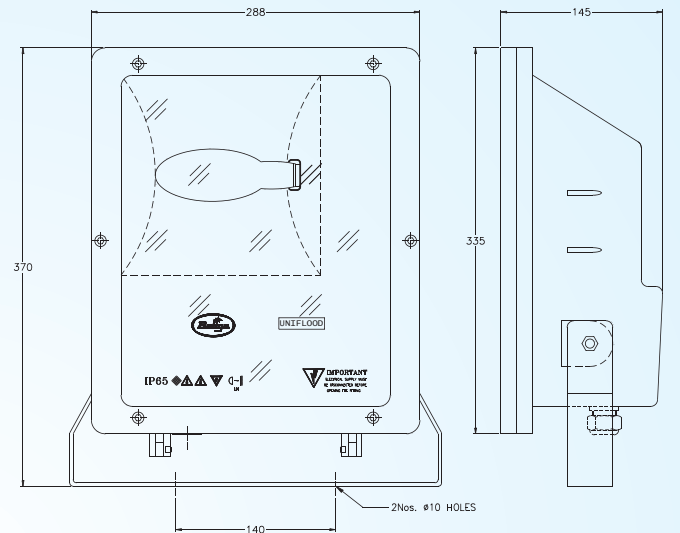

All dimensions are in mm

Type of protection	Weatherproof - Wp
Area Classification	Safe Area
Apparatus Standard	IS - 13947/ 93
Wattage Rating	26 W - 150 W

### Salient Features

- A** To resist the aging & weathering UV Stabilized material is Used for housing.
- B** Tempered glass to resist high impact thermal shock.
- C** Anodised, polished Aluminium reflectors.
- D** Powder coated mounting bracket.
- E** Captive SS screws for corrosion proofness